

## OPEN AREA SOUNDER BEACON



▲ SEN-A4022



Cert/LPCB ref. 010ak/03

## FEATURES

Open Area Sounder Beacon Visual Indicator is designed for use in open areas and can be connected to a SHIELD Trident System.

- Self-test fault monitoring.
- Two volume setting 92 dB(A) and 100 dB(A).
- Individual and group addressing.
- Synchronization of tones and flashes.
- Built-in isolator.
- Loop-powered.
- IP 65 rated.

## TECHNICAL DATA

Operating voltage	17-28 VDC (polarity sensitive)	
Protocol pulses	5-9 V	
Current consumption at 24V	Switch-on surge Quiescent Alarm, sounder 92/100 dB(A) Alarm, sounder beacon Alarm beacon	1.2 mA for <1 sec 333 µA 5 mA 8 mA 3.1 mA
Operating temperature	-10 °C to 55 °C	
Maximum sound output	100 dB(A)	
IP rating	65	
Dimensions (D x H)	104 mm x 97.5 mm	

## ORDERING INFORMATION

SEN-A4022	Open Area Sounder Beacon
SEN-A4025	Enhanced Deep Isolating Base

## WIRING DIAGRAM

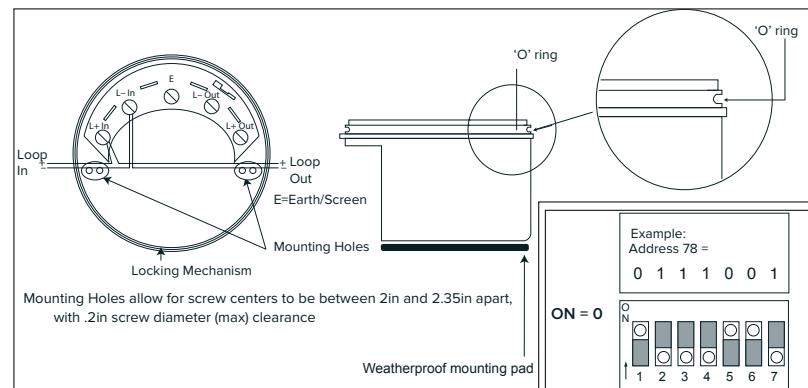


Fig 1. Wiring diagram

Fig 2. Example of Address